

# EASY VALUE

AFO EM4SV



#### **DESCRIPTION**



Capacity: 4 x 60x40 - 1/1 GN



Trays insertion: Crosswise



Dimensions: 865 x 735 x H 565 mm



Control panel: Analogic



Indicative quantity of meals: 48



Cooking chamber heating: Electric




Steam generation: direct system

#### **COOKING MODES AND FUNCTIONING**

<b>\$\$\$</b>	Convection mode	Temperature range between 50 °C and 270 °C
% <del>=</del> >	Convection with steam	Adjustable steam quantity
(%)	Autoreverse	Automatic reversal of fan rotation



#### **CONTROL PANEL COMPONENT DESCRIPTION**

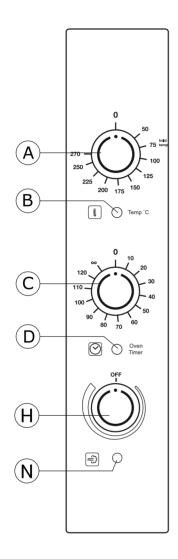

Α	Cooking chamber thermostat	
В	Heating cooking chamber ON pilot light	
С	Timer	
D	Timer ON pilot light	
Н	Steam regulation	
N	Steam ON pilot light	
	·	

#### **MANUFACTURING FEATURES**

- Heating system located on the back side of the cooking chamber;
- Waterproof cooking chamber in stainless steel AISI 304;
- Cooking chamber with external welding;
- External covering panels made of satin stainless steel AISI 430;
- Base chassis made of stainless steel AISI 430;
- Heating elements made of stainless steel Incoloy 800;
- Thermal insulation of the cooking chamber in ceramics fibre;
- Cooking chamber fans made of stainless steel;



## **EASY VALUE**

#### AFO EM4SV

#### **OPTIONAL ACCESSORIES**

Code	Description
AFO 687	Stand
AFO 689	Stand with shelf
AFO 691	Stand with tray-slides

Code	Description	

#### **DIMENSIONS**

	OVEN	PACKAGE
Width	865 mm	900 mm
Depth (with door handle)	745 mm	770 mm
Height	565 mm	755 mm
Weight/Volume		65 kg / 0.52 m <sup>3</sup>

#### **WATER SUPPLY**

Water supply coupling	Ø ¾" gas
Water pressure	1.5 - 2.5 bar
Water hardness	4 - 12 °f = 40 - 120 ppm
Water conductivity	50 ÷ 2000 μS/cm
Chlorine concentr. Cl2	< 0.2 mg/litre
Chloride concentration	<150 mg/litre
Water drain coupling	Ø 40 mm


#### **POWER SUPPLY**


Model	AFO EM4SV
Power loading	6.5 kW
Chamber power	6.0 kW
Power of the motors	n° 2 x 240 W
Max. power loading	6.5 kW
Voltage	380 - 415 V 3N ~ 50/60 Hz
Absorbed current	11.0 A
Feed cable section	n° 5 x 2.5 mm²
Capacity	4 x 60x40 - 1/1 GN
Pitch between trays	75 mm




### **EASY VALUE**

AFO EM4SV





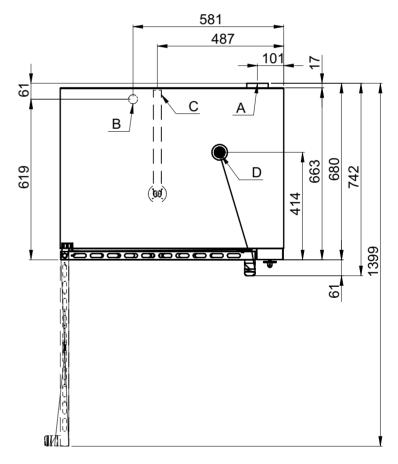

- A Electrical cables connection
- B Water inlet Ø 3/4" gas
- C Water drain
- D Cooking chamber release valve